



VIKAS INDUSTRIES

A GOVT. OF INDIA RECOGNISED STAR EXPORT HOUSE



AN ISO 9001: 2015 CERTIFIED COMPANY
A UL LISTED COMPANY

SPRINKLER HANGER

CONSTRUCTION : IT CONSISTS OF A STRIP OF STEEL FORMED BY BENDING AND HOLDS TOGETHER WITH THE HELP OF KNURLED NUT. THE KNURLED SWIVEL NUT ALLOWS FOR EFFORTLESS INSTALLATION AND VERTICAL ADJUSTMENT OF PIPE LEVELS AFTER THEY HAVE BEEN INSTALLED.



APPLICATION : IDEAL FOR SUSPENDING STATIONERY, NON INSULATED PIPE LINES IN FIRE SPRINKLER SYSTEMS.

APPROVALS : UNDERWRITERS LABORATORIES U.L. , U.L.C. LISTED (SIZE: 1" TO 8")

COMPLIANCE : ANSI / CAN/UL 203:2020 (REF. ASTM A653M, NFPA13, UL 2043)

MATERIAL : MILD STEEL

FINISH : ELECTROGALVANIZED AS PER ASTM B 633.

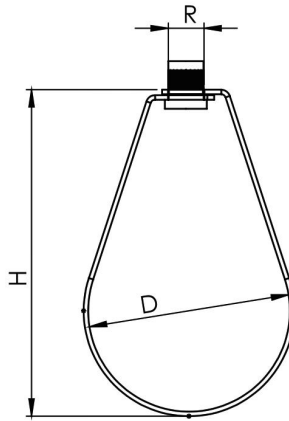

SPRINKLER (BAND) HANGER - SIZES

Article No.	Nominal Pipe Size (Inch)	Diameter (D) MM	Hanger Rod Size (MM) (R) MM	Height (H)	Max Load (Kg.)
VISH-01	3/4"	28	M10	61	220
VISH-02	1"	34	M10	70	220
VISH-03	1-1/4"	42	M10	78	220
VISH-04	1-1/2"	48	M10	84	220
VISH-05	2"	60	M10	102	220
VISH-06	2.5"	75	M10	118	300
VISH-07	3"	89	M10	144	300
VISH-08	3-1/2"	102	M10	160	300
VISH-09	4"	115	M12	178	300
VISH-10	5"	142	M12	219	500
VISH-11	6"	168	M12	262	500

* Can be supplied without knurled nut.